

LED BATTEN LIGHT INSTRUCTION MANUAL




INSTALLATION




CAUTION: RISK OF ELECTRIC SHOCK!


WORK MUST BE CARRIED OUT BY AN ELECTRICIAN OR COMPETENT PERSON. IF IN DOUBT, SEEK PROFESSIONAL ADVICE.

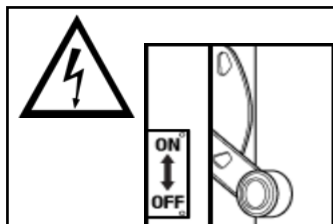


Isolate power to circuit of which light will be installed

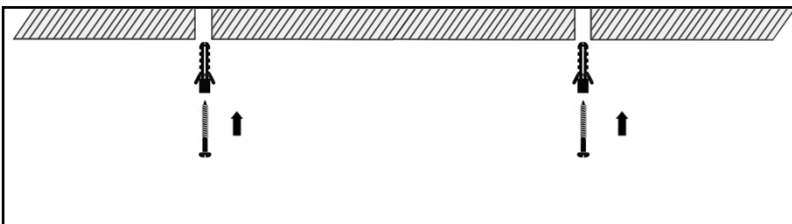


Using appropriate fixings, insert screws into ceiling. Do not screw flush to ceiling, instead leaving 5mm of the top of the screw exposed.

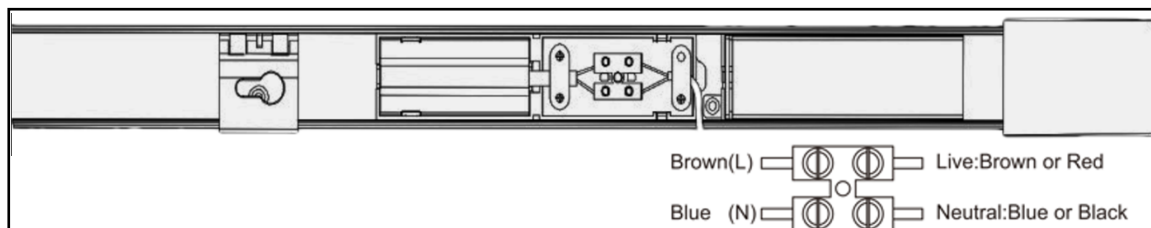


Unclip connection enclosure cover. Connect as shown in diagram (Earth wire is not required). Use cable clamp to keep cable in place. (If there is more than 1 no cable to connect, an external junction box may be required.)

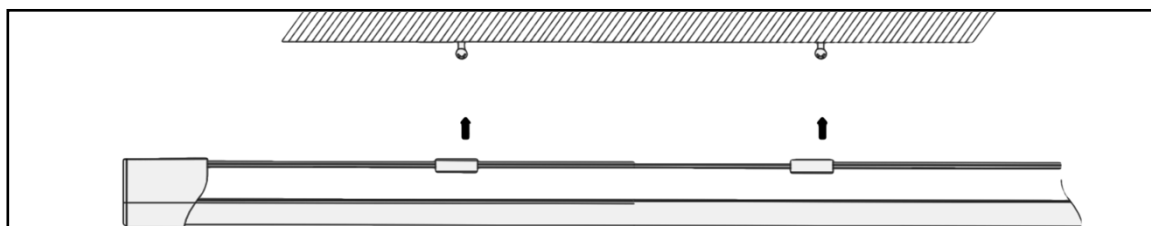


Reattach connection enclosure cover. Dress cable inside light fitting and back into ceiling, line up mounting brackets to screws in the ceiling. Mounting brackets can be slid across fitting to suit location/distance of screws.

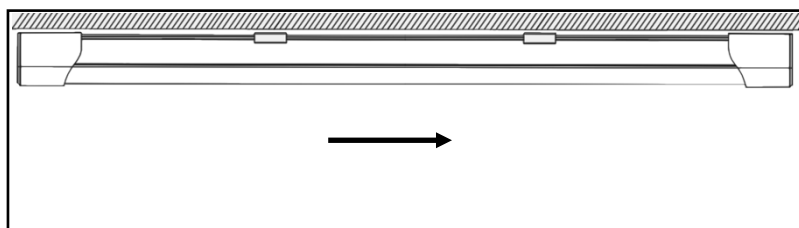

Once screws are lined up with mounting brackets, push fitting to the right to lock into place. If fitting does not sit flush with ceiling, screws may need to be adjusted

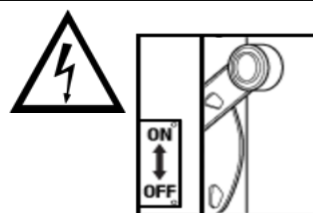

After sufficient testing, power up supply and test further.

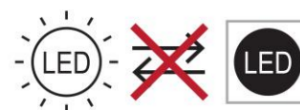

THE LIGHT SOURCE IN THE TRAY CANNOT BE REPLACED. PLEASE DISPOSE OF RESPONSIBLY AND REPLACE ENTIRE LIGHT FITTING

LED BATTEN LIGHT

INSTRUCTION MANUAL



WARNING

- The mains supply cable should must have a cross-sectional area of 1.0mm² minimum.
- Installation must be carried out by a suitably qualified and competent electrician.
- Install in accordance with current IEE Wiring Regulations and applicable Building Regulations.
- To reduce the risk of electric shock, isolate the mains supply before installation or maintenance. Ensure the power cannot be inadvertently switched back on during work.
- This fitting must be connected to an appropriately fused circuit.
- When replacing an existing fitting, carefully note all wiring connections prior to removal.
- The light source in this fitting cannot be replaced, any attempt to do so will invalidate any warranty and cause potential safety risk.
- Suitable for indoor use only. Not designed for installation in bathroom environments
- Lights give a concentrated beam of light and must not be positioned any closer than 0.5M (50cm) to the illuminated surface.

Voltage	AC110-240V
Frequency	50Hz
Wattage	40W
Lumens	4200Lm
Power Factor	>0.6
CRI	>80
Lifespan	15000 hours
Installation	Surface
IP Rating	IP65
Class	II
Beam Angle	180°
Colour Temp	300K/4000K

DISPOSAL

Waste electrical products, should not be disposed of with household waste.
Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.



MAINTENANCE

Repairs or opening of this product must only be carried out by a qualified electrician or authorised service personnel. This luminaire contains non-replaceable light sources. When the light source reaches the end of its life, the entire fitting must be replaced.

For safety, always isolate the power supply at the mains before cleaning or carrying out any maintenance. Allow the fitting to cool before handling.

CLEANING

Always isolate the power supply and allow the fitting to cool before carrying out any cleaning. Clean with a soft, dry cloth only. Do not use abrasive materials, solvents, or cleaning agents, as these may affect the finish and performance of the fitting.

WARRANTY

This product comes with a 2-year warranty. If you have any concerns or questions do not hesitate to contact us.

